


MATERIAL

BESPOKE STONE + TILE

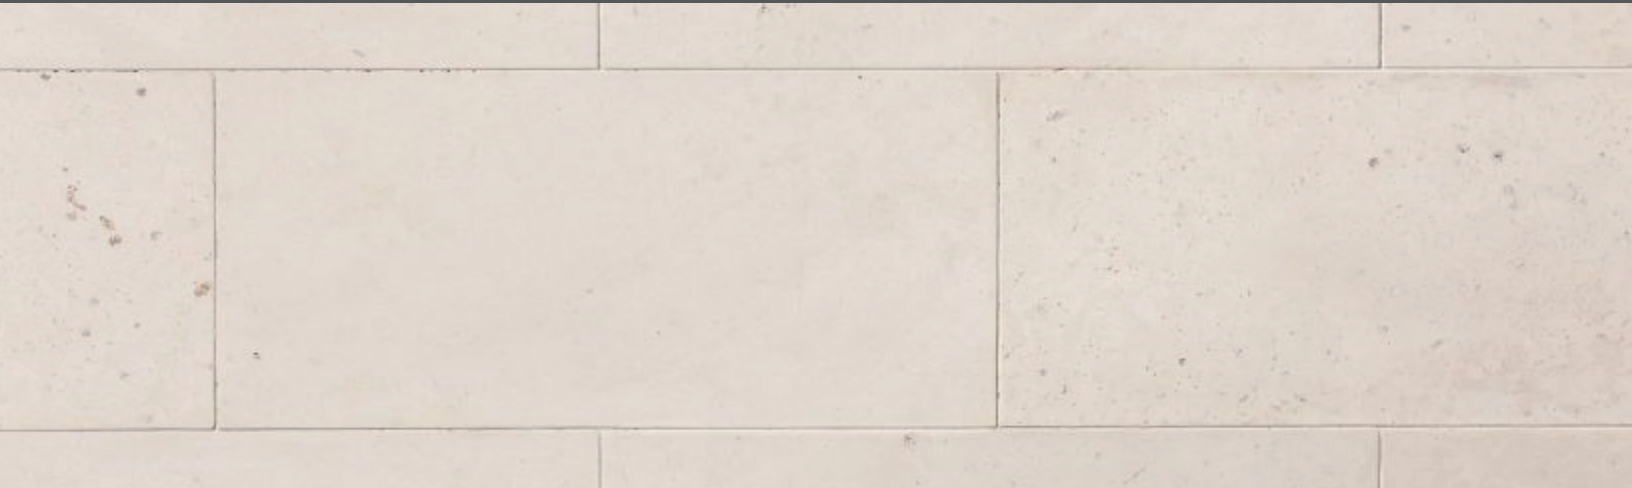

WHITE LIMESTONE

SOURCE: NORTH AMERICA

White is a Texas limestone with medium density, tight grain, and off-white tones varying in brightness. White is excellent for commercial and exterior applications, as it ages well with time and exposure to the elements.

TECHNICAL DATA

ASTM 97 DENSITY	132.1 lbs/ft ³
ASTM 97 ABSORPTION	7.12%
ASTM C170 COMPRESSIVE STRENGTH	5,150 lbs/ft ² wet
ASTM C880 FLEXURAL STRENGTH	890 lbs/ft ² wet
ASTM 353 ABRASION RESISTANCE	LOW lbs/ft ³

AVAILABLE APPLICATIONS

ARCHITECTURAL ELEMENTS
MOLDING
TILE
MOSAICS

CONSIDERATIONS

FREEZE / THAW	APPROVED
SALT WATER	APPROVED
VARIATION	LOW
ACCEPTABLE TRAFFIC	MED

CARE AND MAINTENANCE

- High acid sensitivity is a property of limestone. Care must be taken in the presence of acidic foods and cleaning products.
- Low abrasion resistance is inherent in most limestone. Light scratching will occur with exposure to abrasives. A patina will result over time. Doormats are recommended when used as flooring.
- This limestone has a low to moderate absorption rate. It is recommended to seal this material prior to use to allow for additional time to “clean up” the spill, before it has time to result in a stain.

EXPLOREMATERIAL.COM

ATLANTA | AUSTIN | CHICAGO | COSTA MESA | DALLAS | DENVER | HOUSTON | SAN ANTONIO