


# MATERIAL

BESPOKE STONE + TILE

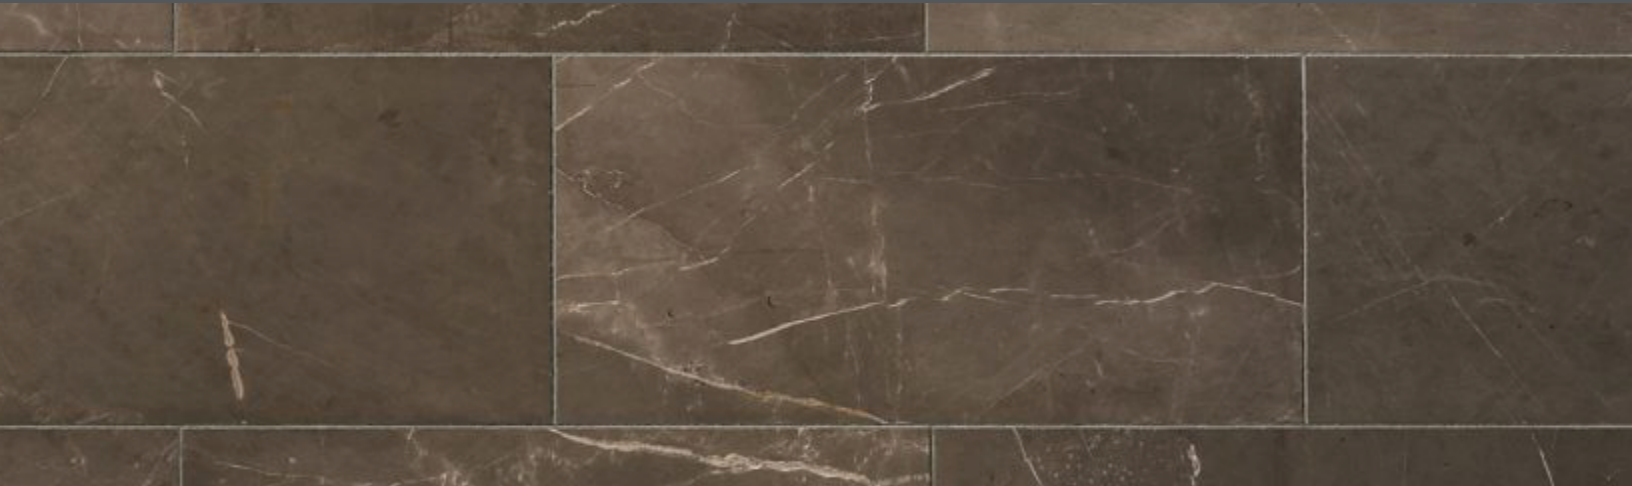

## SABLE MARBLE

SOURCE: NORTH AMERICA

Sable is a medium to dark chocolate colored marble with heavy color range and veining. The deep earthy tones make it a stunning centerpiece in any room.

### TECHNICAL DATA

ASTM 97 DENSITY	167.4 lbs/ft <sup>3</sup>
ASTM 97 ABSORPTION	0.36%
ASTM C170 COMPRESSIVE STRENGTH	18,070 lbs/ft <sup>2</sup> wet
ASTM C880 FLEXURAL STRENGTH	900 lbs/ft <sup>2</sup> wet
ASTM 353 ABRASION RESISTANCE	45.2 lbs/ft <sup>3</sup>

### AVAILABLE APPLICATIONS

ARCHITECTURAL ELEMENTS  
MOLDING  
TILE  
MOSAICS

### CONSIDERATIONS

VARIATION	HIGH
ACCEPTABLE TRAFFIC	HIGH

### CARE AND MAINTENANCE

- High acid sensitivity is a property of marble. Care must be taken in the presence of acidic foods and cleaning products.
- Low abrasion resistance is inherent in most marbles. Light scratching will occur with exposure to abrasives. A patina will result over time. Doormats are recommended when used as flooring.
- This marble has a low to moderate absorption rate. It is recommended to seal this material prior to use to allow for additional time to “clean up” the spill, before it has time to result in a stain.

EXPLOREMATERIAL.COM

ATLANTA | AUSTIN | CHICAGO | COSTA MESA | DALLAS | DENVER | HOUSTON | SAN ANTONIO